



RUSTIK

- ▶ A range of decorative, joint-free stone carpets that bring the vibrancy of the outdoors inside.

Rustik Range Technical Profile



Rustik, Flowcrete’s range of decorative stone carpet systems, delivers a wide range of natural and contemporary tones to suit both indoor and outdoor environments.

Whether in a retail or office environment, leisure complex or showroom, Rustik won’t fail to impress. Boasting slip and chemical resistance, as well as superior durability, Rustik transforms dull commercial environments whilst delivering a floor finish that withstands cleaning products and chemical attack, provides a safe finish underfoot and stands the test of time.

Rustik can be installed in a variety of patterns using brass or aluminium trims, which are laid on the surface of the floor in a matrix that designates each area of the design. Rustik is then simply used to fill each shape, using contrasting colours to create a truly unique and personalised design.

What’s more, the Rustik range benefits from a speedy installation process, reducing impact on trade in commercial businesses, where keeping downtime to a minimum is crucial.

Application Suitability



Retail Outlets



Car Showrooms



Walkways & Paths



Residential



Offices & Lobbies




Hotels & Resorts



Technical Profile

SLIP RESISTANCE	
BS 7976-2	Dry 59 Wet 45
FIRE RESISTANCE	
SITAC	Class G Certificate No 1721/75
TEMPERATURE RESISTANCE	
Tolerant of sustained temperatures up to 50°C	
COMPRESSIVE STRENGTH	
BS 6319	40 N/mm ²
BOND STRENGTH	
> 1.5MPa*	

*Assumes concrete compressive strength is greater than 25N/mm²

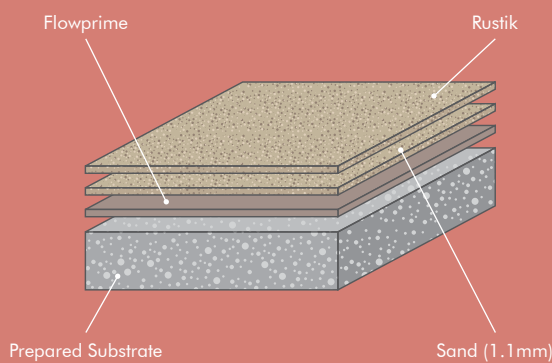

Rustik

Rustik comes in a variety of colourful natural stones encapsulated in a clear epoxy resin, resulting in attractive indoor anti-slip flooring.

Rustik cosmetically enhances, reduces noise and is highly resistant to chemicals, making it suitable for a variety of indoor environments from showrooms and shopping centres to spas, offices and more.



Attractive:

Decorative finish to transform dull commercial environments.



Resistant:

Excellent resistance to chemicals, as well as slips and trips.



Reduces Noise:

Minimises unwanted noise from footsteps in busy commercial spaces.



Versatile:

Rustik can be applied vertically to walls.

Standard Colours



Charcoal



Night Fever



Diesel



Chocky



Copper



Dockyard Blue



Kiwi



Graphite



Natural



Lime White



Cauliflower

The applied colours may differ from the examples shown. For a full colour chart and samples, contact your local Flowcrete office.

Rustik UV

Rustik UV contains colourful natural stones in an aliphatic, UV stable polyurethane resin, providing attractive outdoor anti-slip flooring.

Designed to be a flexible solution for areas with heavy traffic, Rustik UV is weather resistant and offers a durable alternative to loose pebbles, whilst maintaining the natural beauty of the outdoors.



Attractive:

Decorative finish to transform dull commercial environments.



Resistant:

Excellent resistance to chemicals, as well as slips and trips.



UV Resistant:

Suitable for outdoor environments and resistant against colour damage.



Reduces Noise:

Minimises unwanted noise from footsteps in busy commercial spaces.

Standard Colours



Charcoal



Night Fever



Diesel



Chocky



Copper



Dockyard Blue



Kiwi



Graphite



Natural



Lime White



Cauliflower

Technical Profile

SLIP RESISTANCE

TRRL Pendulum Slip Test

Dry >40 Wet 36

TEMPERATURE RESISTANCE

Tolerant of sustained temperatures up to 65°C

COMPRESSIVE STRENGTH



BS 6319

>30 N/mm²

BOND STRENGTH

>1.5MPa*

*Assumes concrete compressive strength is greater than 25N/mm²

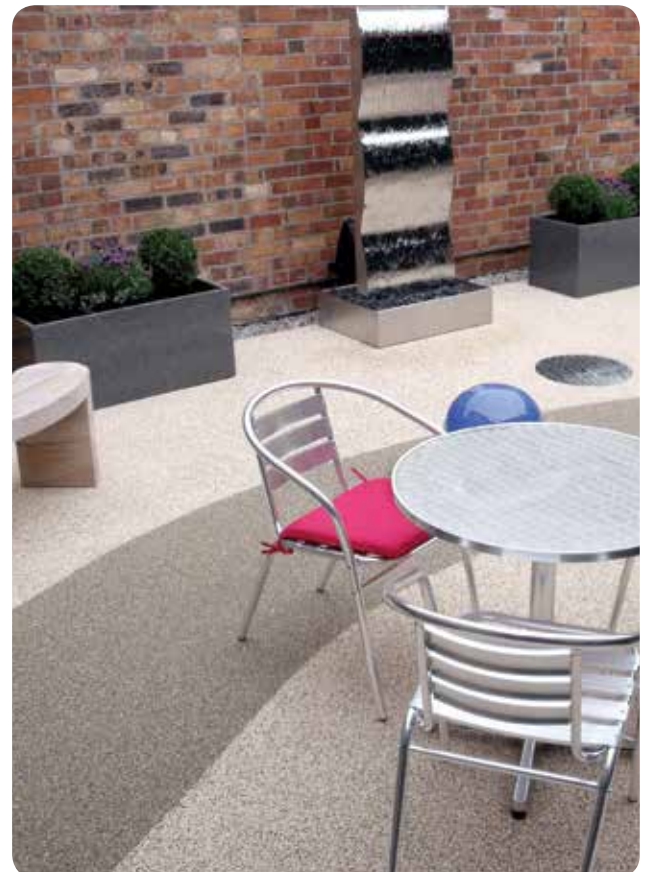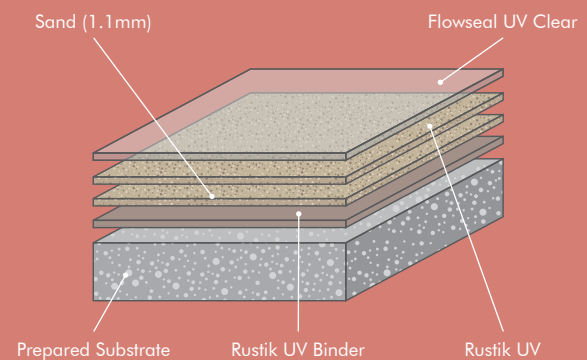

The applied colours may differ from the examples shown. For a full colour chart and samples, contact your local Flowcrete office.



Naturewalk

A seamless and slip resistant bonded gravel system, made of natural stone aggregates to complement a variety of outdoor settings.

Naturewalk is an attractive and versatile range. Offering a durable alternative to loose gravel, Naturewalk is ideal for environments subject to heavy foot traffic such as leisure complexes, theme parks and holiday resorts.



Slip Resistant:

The various aggregates help increase grip for foot traffic.



Attractive:

A range of eye-catching colours can be laid in unique patterns.



Easy to Clean:

A seamless, smooth finish that is easy to clean and maintain.



Fast Curing:

Minimises downtime for less interruption to industry.

Standard Colours



Charcoal



Night Fever



Diesel



Chocky



Copper



Dockyard Blue



Kiwi



Graphite



Natural



Lime White



Cauliflower

The applied colours may differ from the examples shown. For a full colour chart and samples, contact your local Flowcrete office.

Technical Profile

SLIP RESISTANCE

Good wet & dry slip resistance from the textured aggregate.

TEMPERATURE RESISTANCE

Softens over 70°C, hardens on cooling

WATER PERMEABILITY

Karsten Test Nil (Impermeable)

IMPACT RESISTANCE

ISO 6272 1 kg weight > 1.8 m
2 kg weight > 1.5 m

ABRASION RESISTANCE

Dependant upon aggregate selection.

CHEMICAL RESISTANCE


Good resistance to tea, coffee, cola, fruit juice, detergents and bleach.

BOND STRENGTH


> 1.5 MPa*

SPEED OF CURE**	10°C	20°C	30°C
Light Traffic	2 hrs	2 hrs	2 hrs
Full Traffic	24 hrs	24 hrs	24 hrs
Full Chemical Cure	7 days	7 days	7 days

*Assumes concrete compressive strength is greater than 25N/mm²

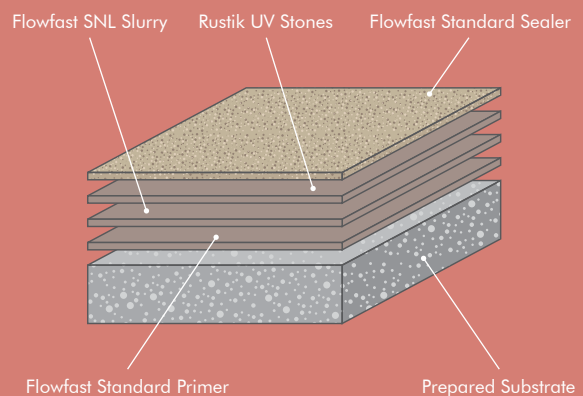

** Cure times at temperatures between 0-30°C can be achieved by altering the quantity of catalyst used. For applications falling outside of this temperature range, please contact your local Flowcrete Technical Department.

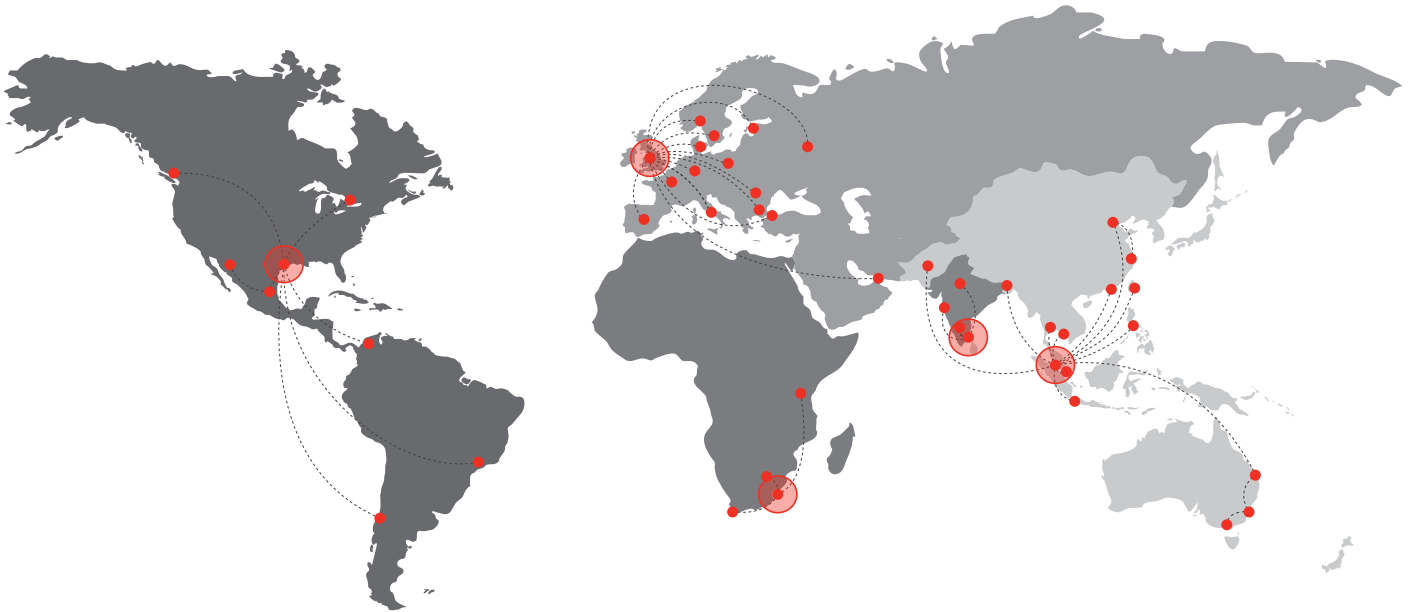

Flowcrete

World leader in seamless resin flooring solutions and other specialist coatings.

Europe & Middle East

Baltic States	+48 883 303 880	latvia@flowcrete.com
Bulgaria	+359 898 61 58 31	bulgaria@flowcrete.com
Denmark	+46 435 40 01 10	denmark@flowcrete.com
France	+33 1 60 61 74 42	france@flowcrete.com
Germany	+49 4187 50 29 470	germany@flowcrete.com
Italy	+39 339 4853258	italy@flowcrete.com
Norway	+47 6486 0830	norway@flowcrete.com
Poland	+48 22 879 8907	poland@flowcrete.com
Romania	+40 766 596 991	romania@flowcrete.com
Russia	+7 916 931 35 13	russia@flowcrete.com
Spain	+34 937 07 0872	spain@flowcrete.com
Sweden	+46 435 40 01 10	sweden@flowcrete.com
Turkey	+90 212 294 6567	turkey@flowcrete.com
UAE	+971 4 886 4728	uae@flowcrete.com
UK	+44 1270 753 000	uk@flowcrete.com

Africa

East Africa	+254 20 682 1011	eastafrica@flowcrete.com
South Africa	+27 31 701 0017	southafrica@flowcrete.com

India

India	+91 44 4017 6600	india@flowcrete.com
-------	------------------	---------------------

Asia Pacific

Australia	+61 7 3205 7115	australia@flowcrete.com
Bangladesh	+88 02 985 7222	bangladesh@flowcrete.com
China	+86 10 8472 1912	china@flowcrete.com
Hong Kong	+852 2795 0478	hongkong@flowcrete.com
Indonesia	+62 21 252 3201	indonesia@flowcrete.com
Malaysia	+60 3 6277 9575	malaysia@flowcrete.com
Pakistan	+92 337 3159272	pakistan@flowcrete.com
Philippines	+63 2 834 6506	philippines@flowcrete.com
Singapore	+65 6848 7166	singapore@flowcrete.com
Taiwan	+886 916 954 291	taiwan@flowcrete.com
Thailand	+66 2539 3424	thailand@flowcrete.com
Vietnam	+84 28 6287 0846	vietnam@flowcrete.com

Americas

Brazil	+55 11 3230 1107	brazil@flowcrete.com
Canada	+1 604 628 1782	canada@flowcrete.com
Chile	+56 2 2938 1962	chile@flowcrete.com
Colombia	+57 1 381 9254	colombia@flowcrete.com
Mexico	+01 800 099 0468	mexico@flowcrete.com
USA	+1 936 539 6700	usa@flowcrete.com

*Whilst every care has been taken to ensure that the information included in this document was accurate at the time of printing, Flowcrete reserves the right to change product specifications at any time without prior notice. The photographs and colours reproduced in this publication are within the constraints of the printing process and are not to be used for matching purposes. All photographs are used for approximate representation only and may not show the actual products on offer. E&OE.